


STANDARD
TYPE A-24"

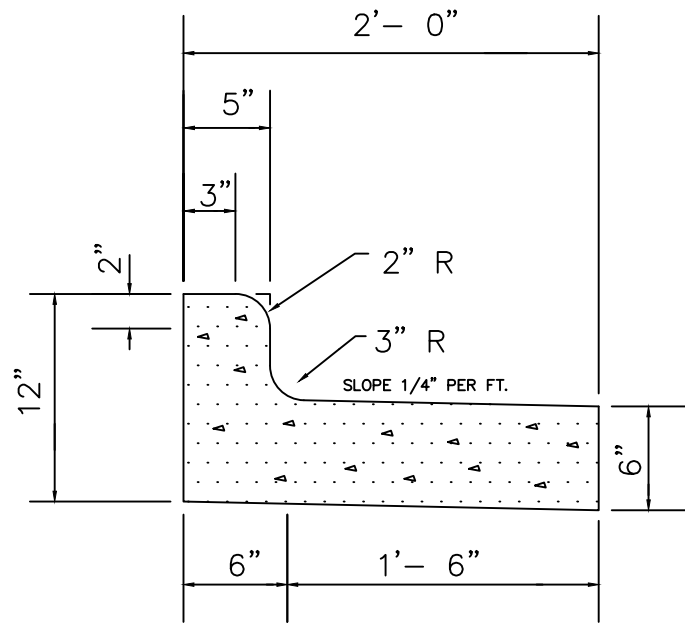

PITCHED
TYPE B-24"

NOTES:

1. PITCHED GUTTER TO BE USED IN ALL CASES WHERE PAVEMENT IS SLOPED AWAY FROM CURB.
2. CURB AND GUTTER TO BE CONSTRUCTED IN 10 FOOT LENGTHS.
3. 1/2" EXPANSION JOINTS SHALL BE PROVIDED AT INTERVALS NOT TO EXCEED 50 FEET AT THE ENDS AND MID-POINTS OF RETURNS, AND AT ANY POINT WHERE THE NEW CURB AND GUTTER ABUT OTHER CONCRETE STRUCTURES.
4. 5' LONG TRANSITIONS SHALL BE PROVIDED BETWEEN NORMAL GUTTER AND PITCHED GUTTER UNLESS OTHERWISE NOTED ON THE PAVING PLANS.



CITY OF CORDELE, GEORGIA - STANDARD DETAIL

CURB & GUTTER
TYPES A & B

DETAIL NO:

P-001

DATE: OCT 2018