


POINT "A" SHOULD BE HIGHER THAN POINT "B"


PROPER PLACEMENT OF STRAW BALE BARRIER IN DRAINAGE WAY

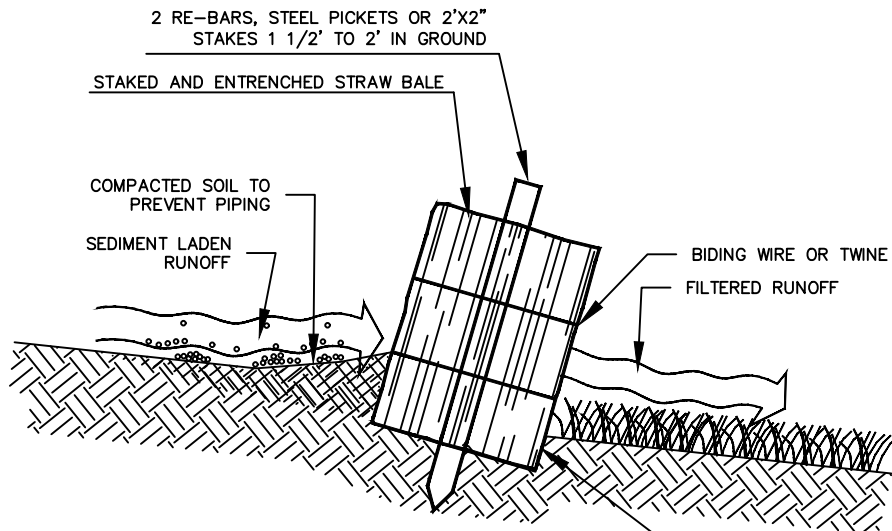

NOTE: EMBED HAY BALES A MINIMUM OF 4 INCHES.

CROSS-SECTION OF A PROPERLY INSTALLED STRAW BALE

'L' = THE DISTANCE SUCH THAT POINTS 'A' AND 'B' ARE OF EQUAL ELEVATION.

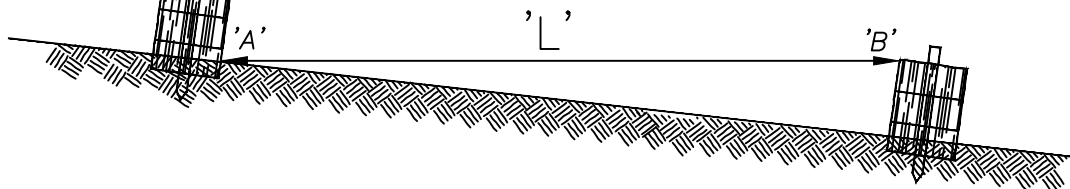

SPACING BETWEEN CHECK DAMS

Cd-Hb HAYBALE CHECK DAM



CITY OF CORDELE, GEORGIA - STANDARD DETAIL

HAYBALE CHECK DAM

DETAIL NO:

E-007

DATE: