

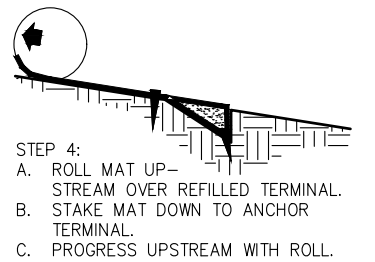
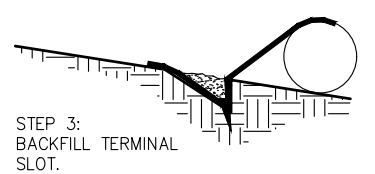
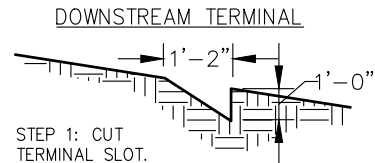
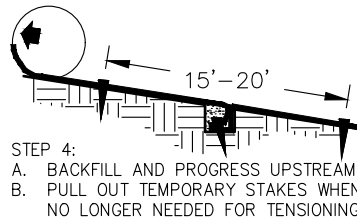
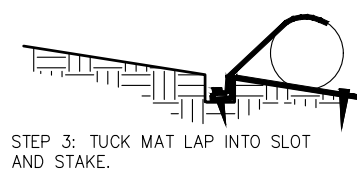
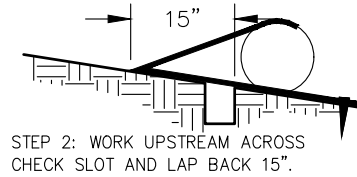
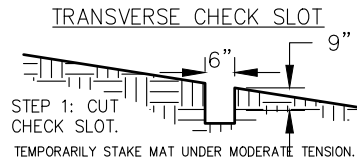




# TYPICAL INSTALLATION GUIDELINES FOR ROLLED EROSION CONTROL PRODUCTS (RECP)


## BLANKET AND MATTING CROSS-SECTIONS

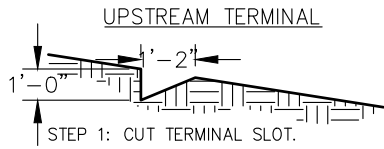

### SEQUENTIAL ROLL RUN OUT IN CHANNELS

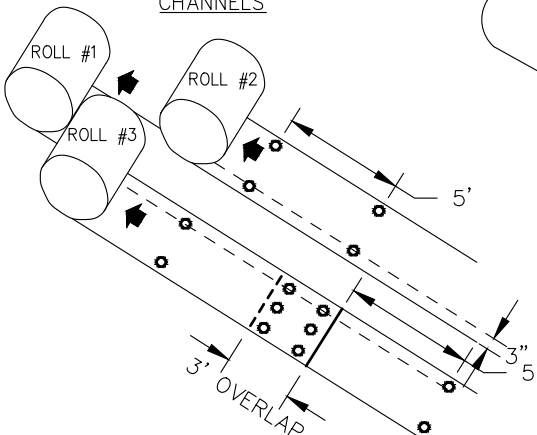

### PICTORAL VIEW OF TRANSVERSE SLOT

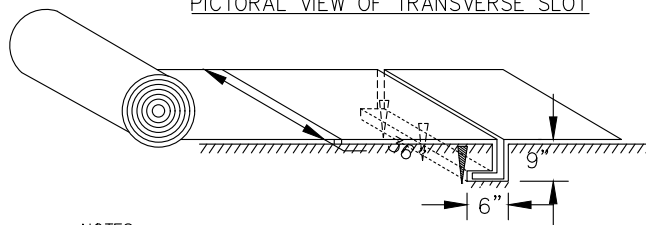

#### NOTES:

1. START AT DOWNSTREAM TERMINAL AND PROGRESS UPSTREAM.
2. FIRST ROLL IS CENTERED LONGITUDINALLY IN MID-CHANNEL AND PINNED WITH TEMPORARY STAKES TO MAINTAIN ALIGNMENT.
3. SUBSEQUENT ROLLS FOLLOW IN STAGGERED SEQUENCE BEHIND THE FIRST ROLL. USE THE CENTER ROLL FOR ALIGNMENT TO THE CHANNEL CENTER.
4. WORK OUTWARDS FROM THE CHANNEL CENTER TO THE EDGE.
5. USE 3" OVERLAPS AND STAKE AT 5' INTERVALS ALONG THE SEAMS.
6. USE 3' OVERLAPS AND SHINGLE DOWNSTREAM TO CONNECT THE LINING AT THE ROLL ENDS.



CITY OF CORDELE, GEORGIA - STANDARD DETAIL

# ROLLED EROSION CONTROL PRODUCTS

DETAIL NO:

E-010

DATE: