


BRUSH SEDIMENT BARRIER

BRUSH BARRIER SECTION

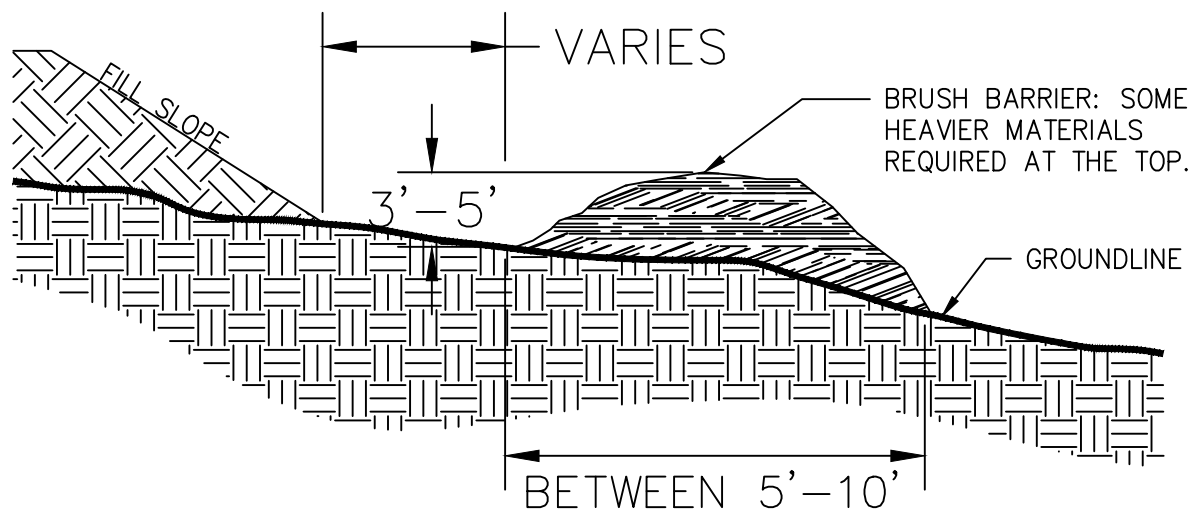

NOTE:

1. INTERMINGLE BRUSH, LOGS, ETC. SO AS TO NOT FORM A SOLID DAM.
2. BRUSH SHOULD BE WIND-ROWED ON THE CONTOUR AS CLOSE AS POSSIBLE.
3. MINIMUM BASE WIDTH FOR BARRIER SHALL BE 5 FEET AND SHOULD BE NO WIDER THAN 10 FEET. THE HEIGHT OF THE BARRIER SHOULD BE BETWEEN 3' AND 5'.
4. A COMMERCIALY AVAILABLE FILTER FABRIC MAY BE PLACED ON THE SIDE OF THE BRUSH BARRIER RECEIVING SEDIMENT-LADEN RUNOFF FOR ADDED FILTER CAPACITY (LOWER EDGE MUST BE BURIED IN A 6 INCH DEEP TRENCH AND THE UPPER EDGE MUST BE FASTENED TO THE BRUSH BARRIER).



CITY OF CORDELE, GEORGIA - STANDARD DETAIL

BUSH SEDIMENT BARRIER

DETAIL NO:

E-013

DATE: