


# TEMPORARY SEDIMENT TRAP


COURTESY OF CITY OF KNOXVILLE BMP EROSION AND SEDIMENT

## OVERFLOW

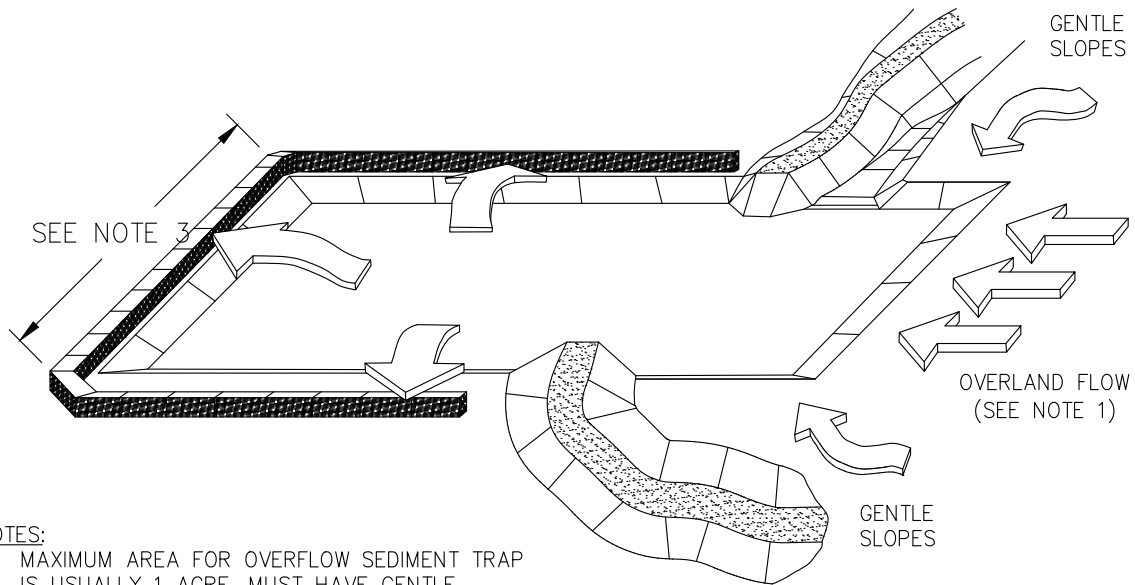

### NOTES:

1. MAXIMUM AREA FOR OVERFLOW SEDIMENT TRAP IS USUALLY 1 ACRE. MUST HAVE GENTLE SLOPES (LESS THAN 2% GRADUALLY) AND PREDOMINATELY OVERLAND SHEET FLOW.
2. MAXIMUM PERMANENT WET DEPTH IS 2 FEET. OVERFLOW SEDIMENT TRAPS MAY NOT BE EFFECTIVE FOR HIGH GROUNDWATER TABLE AND INFLOWS.
3. USE THE MOST PERMEABLE SEDIMENT CONTROL IN LABELED AREA SO AS TO MAXIMIZE TRAVEL TIME AND SETTLING OF SEDIMENT.

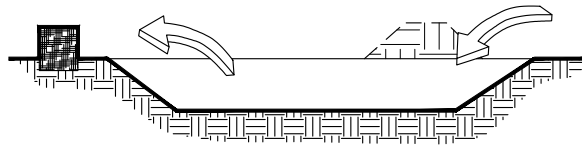

**CITY OF CORDELE, GEORGIA - STANDARD DETAIL**

# **TEMPORARY SEDIMENT TRAP OVERFLOW**

DETAIL NO:

E-020

DATE: