



A RIDGE OF COMPACTED SOIL PLACED ACROSS A SLOPE OR ROAD BED TO SHORTEN ITS SURFACE RUNOFF FLOW LENGTH.

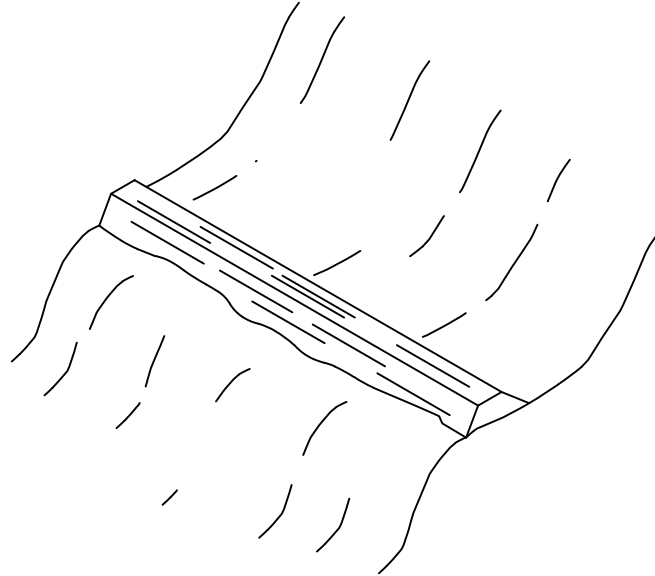

- GENERAL LIFE  $\leq$  1 YEAR
- MINIMUM DIMENSIONS

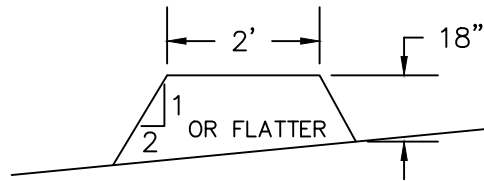

- GRADE: 1% TO 1 1/2%
- SPACING

SLOPE ABOVE DIKE	DISTANCE BETWEEN DIKES
> 10%	150'
5% TO 10%	200'
< 5%	300'

- MACHINE COMPACTED
- OUTLET TO STABILIZED AREAS
- REMAIN UNTIL SLOPE PERMANENTLY STABILIZED
- PERIODIC INSPECTION REQUIRED



**CITY OF CORDELE, GEORGIA - STANDARD DETAIL**

**E-029 (Dk2) INTERCEPTOR  
DIKE**

DETAIL NO:

E-029

DATE: