


A FLEXIBLE CONDUIT TO CARRY RUNOFF DOWN A SLOPE



- TEMPORARY
- PLACE ON UNDISTURBED OR WELL COMPACTED SOIL
- DESIGN TO HANDLE MAXIMUM RUNOFF EXPECTED DURING THE LIFE OF THE DRAIN
- ENTRANCE SECTION, SLOPE TOWARD OUTLET, 1/2"/FOOT
- THOROUGHLY COMPACT SOIL AROUND ENTRANCE SECTION
- USE 12" LONG CORRUGATED METAL PIPE FOR EXTENSION COLLARS TO SECURE FABRIC
- ANCHOR IN SOIL AT 20' CENTERS
- OUTLET TO STABILIZED AREAS ONLY
- REMOVE WHEN PERMANENT WATER DISPOSAL SYSTEM IS INSTALLED
- INSPECT FOR DAMAGE AFTER EACH RAINFALL EVENT

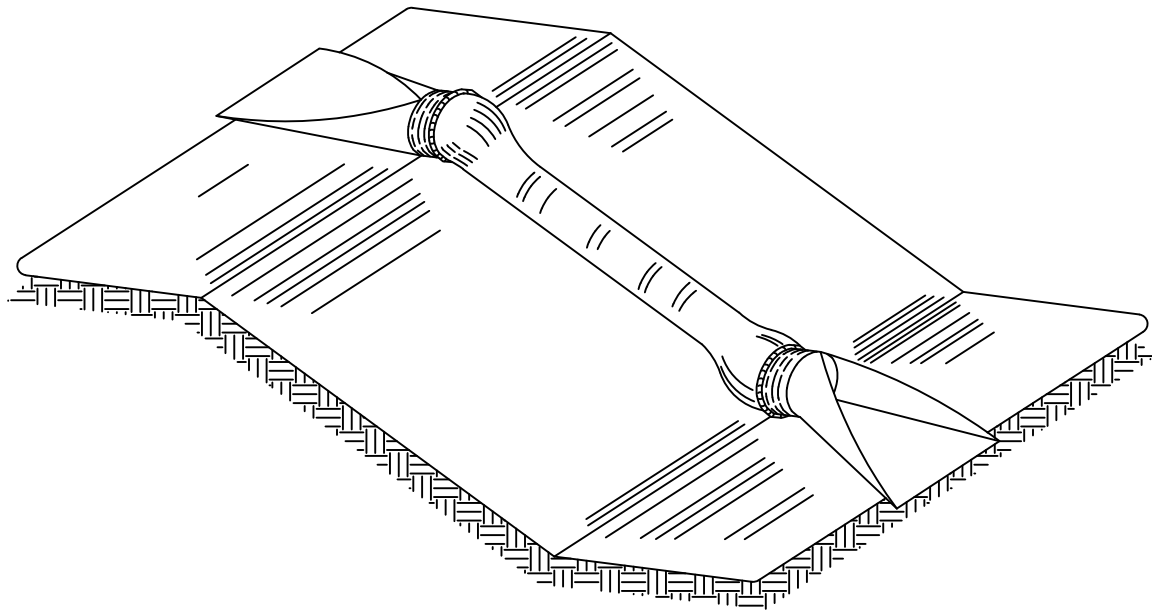

**CITY OF CORDELE, GEORGIA - STANDARD DETAIL**

**(Dn2) DOWNDRAIN  
STRUCTURE (FLEXIBLE)**

DETAIL NO:

E-033

DATE: