


WALL USED WHERE MAXIMUM PERMISSIBLE SLOPES ARE NOT POSSIBLE WITHOUT THE WALL



- MADE WITH CONCRETE MASONRY, REINFORMED CONCRETE CRIBBING, TREATED TIMBERS, STEEL PILINGS, GABIONS, STONE DRY WALL, ROCK RIPRAP, ETC.
- EACH SITUATION REQUIRES A SPECIFIC DESIGN BY QUALIFIED PERSON
- DESIGN FACTORS INCLUDE:
 - * STRESSES
 - * LOAD FORCES
 - * ALLOWABLE HEIGHT
 - * MINIMUM THICKNESS
 - * FOUNDATION DESIGN
 - * BEARING VALUES OF SOILS
 - * FOOTING DIMENSIONS
 - * SAFETY HAZARD
 - * SUBSURFACE AND SURFACE DRAINAGE
 - * APPEARANCE

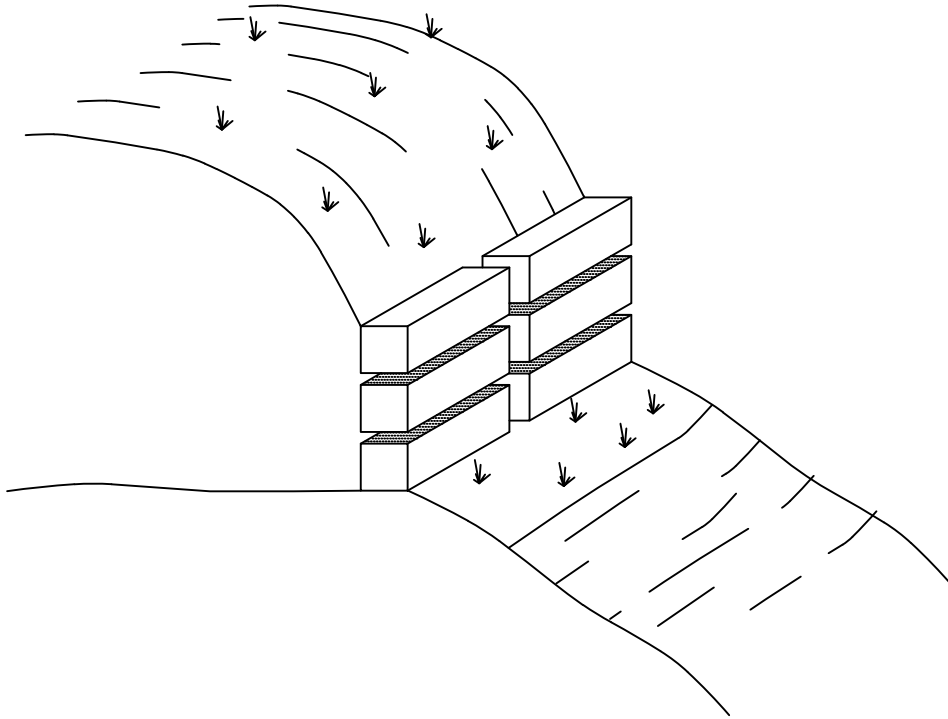

CITY OF CORDELE, GEORGIA - STANDARD DETAIL

(Re) RETAINING WALLS

DETAIL NO:

E-041

DATE: