



ANGLE FIRST STAKE TOWARD PREVIOUSLY LAID BALE

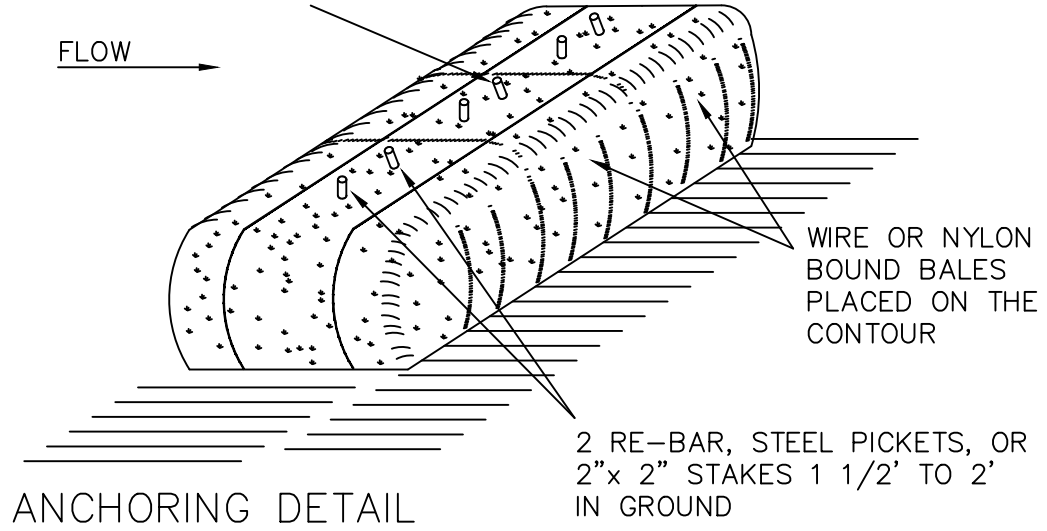

- ANCHOR AND EMBED INTO SOIL TO PREVENT WASHOUT OR WATER WORKING UNDER BARRIER.
- IF COMMERCIAL FABRICS USED, INSTALL BOTTOM EDGE IN A 12" OR 18" DEEP TRENCH.

A BARRIER TO FILTER SEDIMENT FROM RUNOFF THEREBY PREVENTING IT FROM LEAVING THE SITE

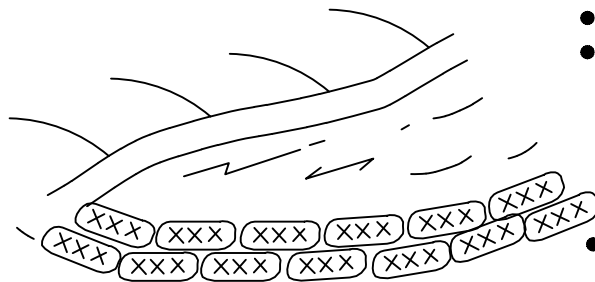

- TEMPORARY
- TYPES INCLUDE:
 - HAY BALES
 - BRUSH
 - LOGS & POLES
 - GRAVEL
 - SEDIMENT OR SILT FENCES
- FOR UNPROTECTED AREAS ≤ 1/2 ACRES
- FOR AREAS WHERE LENGTH OF SLOPE ABOVE BARRIER ≤ 100'
- AVOID "HIGH RISK" AREAS OR WHERE WATER CONCENTRATES

REPAIRS OR REPLACEMENT MUST BE MADE PROMPTLY AS NEEDED.



CITY OF CORDELE, GEORGIA - STANDARD DETAIL

(Sd1) SEDIMENT BARRIER

DETAIL NO:

E-043

DATE: