


STRIPPING AND STORING FERTILE TOPSOIL TO BE RESPREAD  
AFTER CONSTRUCTION



- RECOMMENDED FOR SIDE 2:1 OR FLATTER SLOPES
- TOPSOIL SHOULD BE TESTED TO JUSTIFY STRIPPING
  - \* pH 5.0 TO 7.5
  - \* SOLUABLE SALTS  $\leq$  500ppm
- STOCKPILE SHOULD NOT OBSTRUCT NATURAL DRAINAGE OR CAUSE OFF-SITE ENVIRONMENTAL DAMAGE
- RECOMMEND RESPREADING 5" DEEP

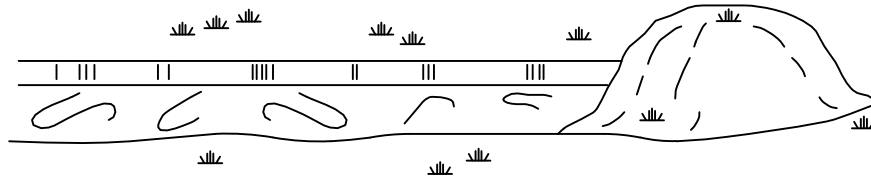

**CITY OF CORDELE, GEORGIA - STANDARD DETAIL**

**(Tp) TOPSOILING**

DETAIL NO:

E-050

DATE: